

**NOTE:**  
ALL LETTERS ARE 1" SERIES  
AT 1" SPACING




FTP-21-06



FTP-22-06

**NOTE:**

1. SIZE TO BE 5 FEET IN HEIGHT AND WHITE IN COLOR.

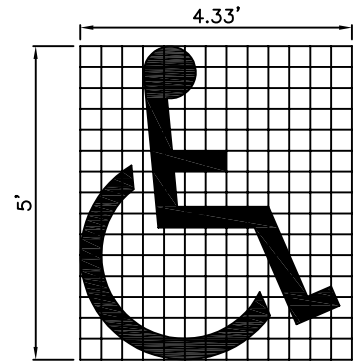

4.53 S.F.

ACCESSIBLE PAVEMENT SYMBOL

SIGNAGE NOTES:

1. FTP-21-06 & FTP-22-06 SIGN SHALL BE IN ACCORDANCE WITH FDOT STANDARD PLANS INDEX 700-102.
2. SIGN POST SHALL BE IN ACCORDANCE WITH BROWARD COUNTY TRAFFIC ENGINEERING DIVISION "GROUND SIGN ASSEMBLY DETAILS", LATEST REVISION.

NOTES:

1. PROVIDE PAVEMENT SYMBOL IN ACCESSIBLE PARKING SPACES. THE SYMBOL SHALL BE WHITE IN COLOR PER ADA STANDARDS.
2. BLUE MARKINGS SHALL BE SHADED.
3. SLOPES NO GREATER THAN 1:48 SHALL BE PERMITTED IN ALL DIRECTIONS FOR BOTH THE ACCESSIBLE PARKING SPACE AND ACCESSIBLE PARKING ACCESS AISLE.
4. ALL RAMPS, SIDEWALK, CURB RAMPS, AND ACCESSIBLE ROUTES SHALL BE ADA COMPLIANT.
5. WIDTH MEASUREMENTS OF PARKING SPACES AND ACCESS AISLES SHALL BE MADE FROM THE CENTERLINE OF THE WHITE PAVEMENT MARKINGS. HOWEVER, WHEN PARKING SPACES OR ACCESS AISLES ARE ADJACENT TO A CURB OR EDGE OF PAVEMENT AND NOT ADJACENT TO ANOTHER PARKING SPACE OR ACCESS AISLE; THEN THE WIDTH MEASUREMENTS MAY INCLUDE THE FULL WIDTH OF THE LAST PAVEMENT MARKING.
6. ALL ACCESSIBLE ELEMENTS SHALL BE COMPLIANT WITH THE DEPARTMENT OF JUSTICE 2010 ADA STANDARDS FOR ACCESSIBLE DESIGN AND THE FLORIDA BUILDING CODE LATEST EDITION FOR "ACCESSIBILITY".
7. ALL PARKING PAVEMENT MARKINGS SHALL BE 4" REFLECTORIZED PAINT MEETING FDOT/BCTED STANDARDS.
8. ACCESSIBLE PARKING SIGNS SHALL BE 60" MINIMUM ABOVE FINISH FLOOR OR GROUND SURFACE MEASURED FROM BOTTOM OF THE SIGN.



ISSUED: MAY 2023  
DRAWN: EG  
APPROVED: JG

DEPARTMENT OF DEVELOPMENT SERVICES  
ENGINEERING, TRANSPORTATION & MOBILITY DIVISION  
  
ACCESSIBLE PARKING SPACE DETAILS  
(2 OF 2)

REVISED: -  
DRAWING NO.:  
C-22